



130 x 80 x 160 mm



0.8 kg



Steel / HDG



BS EN 13374, class A



### Description

The VT Tank Foot is suitable for connection to all horizontal surfaces, such as a concrete slab. Its four supporting points on the underside of the foot make for a very fast and straight forward installation.

Due to its design the VT Tank Foot provides a greater level of strength than a standard foot and it also allows for edge protection to be positioned closer to the slab edge when used with the correct anchor.

Furthermore it is fairly small and therefore easy to store and transport.

A distinct tether point marked with orange labeling indicates where a user should connect a caribiner or similar.

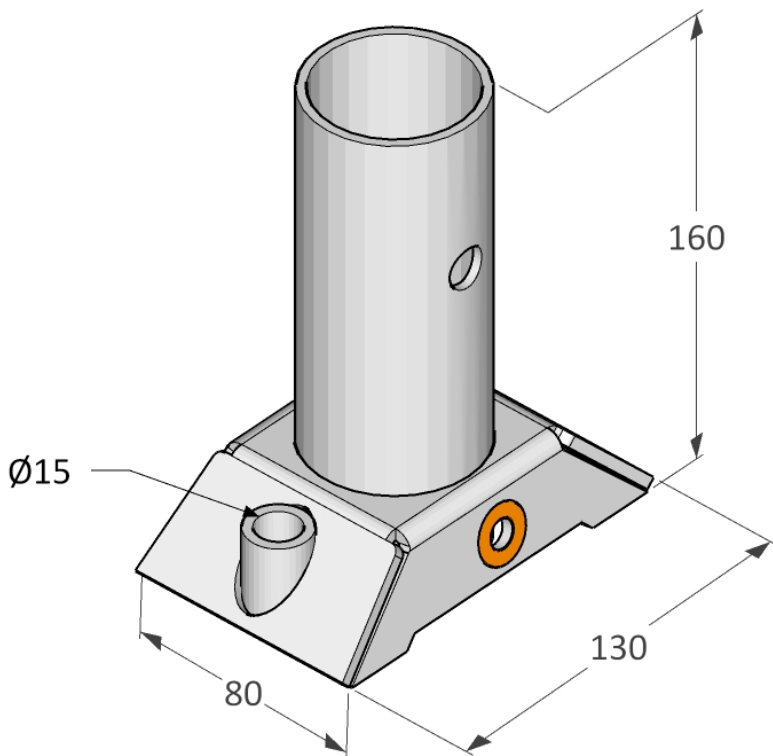

300 pcs / Eurobox



1240 x 835 970 mm



310 kg

### Means of Fixation

Tensile load of the screws min. 10 kN  
→ Hilti HUS3-H10 L-130mm or the like / better, assembly torque limit min. 60 Nm

### General Safety

Health and Safety Regulations should be followed at all times.

For more information:

→ [viva-tec.co.uk/safety](http://viva-tec.co.uk/safety)